
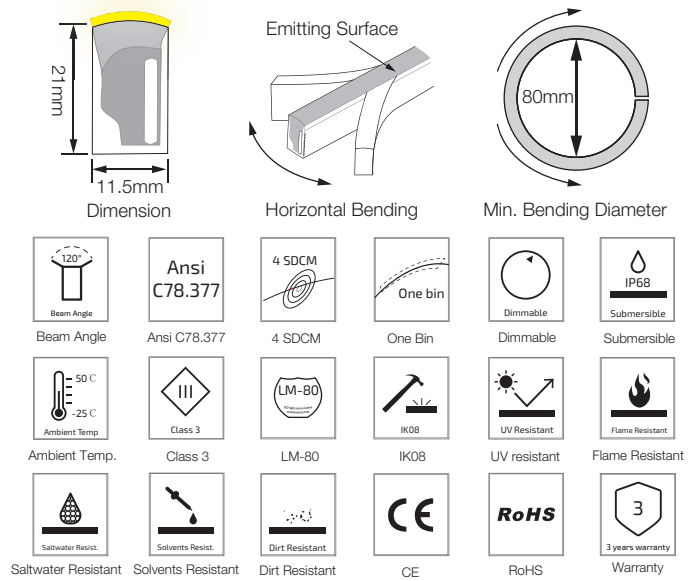


F15 Mono Color LED linear Flex

S15-12V-3528-72-2200K-6500K




Specification

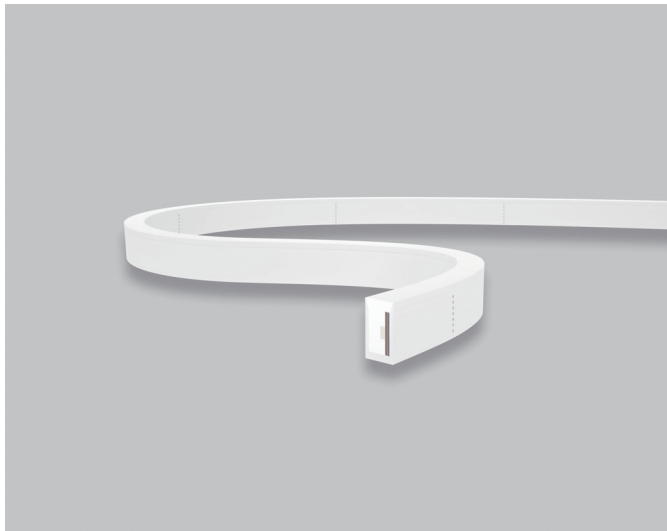

Technical Parameters

Electrical	Optional Color	Lumen Output
Input Voltage	2200K(2238±102K)	130lm/m
Power Consumption	2700K(2725±145K)	130lm/m
Physical		
LED Count	3000K(3045±175K)	140lm/m
Cutting Unit	3500K(3465±245K)	140lm/m
Cutting Unit Length	4000K(3985±275K)	150lm/m
Minimum Bend Diameter	4500K(4503±243K)	150lm/m
Output		
LED Light	5000K(5029±283K)	160lm/m
CRI	6500K(6532±510K)	160lm/m
Max Run Length*	Green(520-530nm)	80lm/m
Single Feed	Blue (520-530nm)	35lm/m
Double Feed	Red (620-630nm)	48lm/m
Beam Angle	Pink(630-645nm)	60lm/m
Lumen Maintenance	Amber(585-595nm)	48lm/m
70,000 Hours L70 @ 25°C	Orange(600-610nm)	35lm/m
50,000 Hours L70 @ 50°C		
Temperature Ranges		
Installation		
Operating		
Dependability		
Warranty		
IP Rating		

Illuminance Distribution

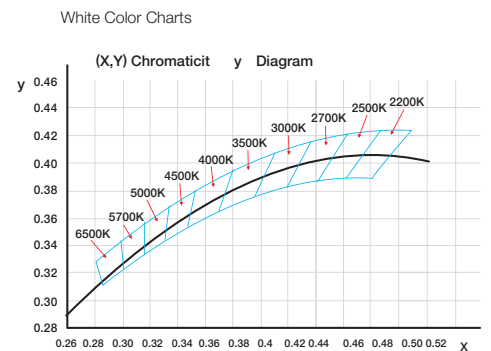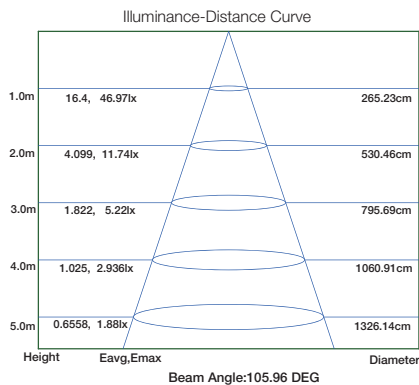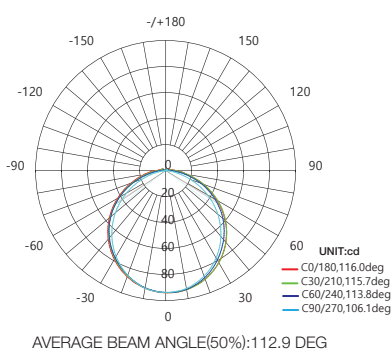

S15 Mono Color LED Linear Flex

Connection

FG (Green)
AC/L (Brown)
AC/N (Blue)

