
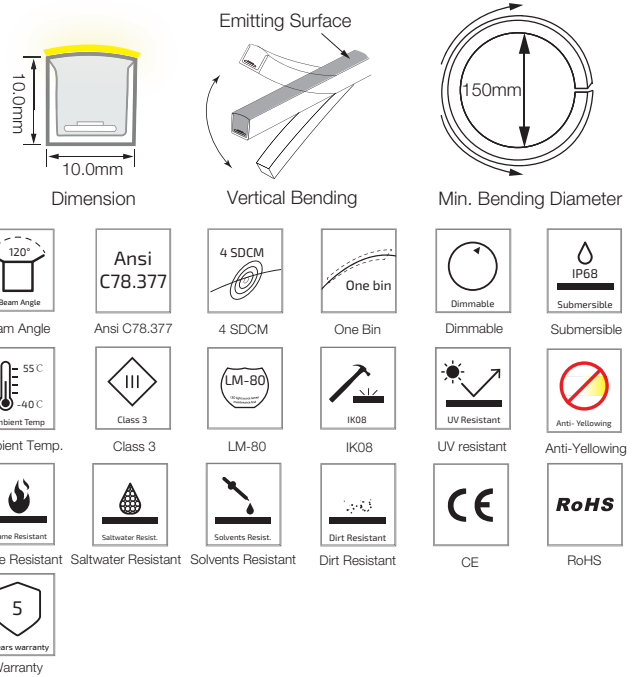


# SF06 Mono Color Silicone LED Linear Flex

SF06-24V-2835-120-2200K-6500K

## Specification


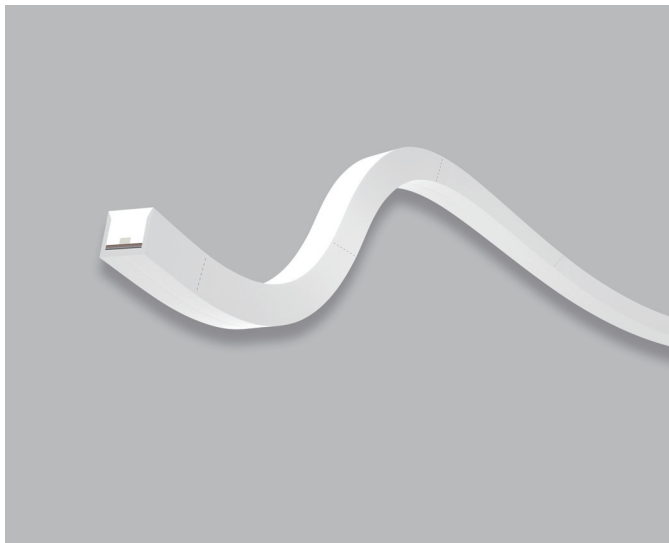


## Technical Parameters


Electrical	
Input Voltage	24V DC
Power Consumption	10W/m
Physical	
LED Count	120 LEDs/m
Cutting Unit	12 LEDs
Cutting Unit Length	100 mm
Minimum Bend Diameter	150mm
Output	
LED Light	Epistar SMD LED 2835
CRI	>80, >90
Max Run Length*	
Single Feed	5 M
Double Feed	10 M
Beam Angle	120°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
Warranty	5 Years Warranty
IP Rating	IP68 Wet location submersible <2m

Optional Color	Lumen Output
	2200K(2238±102K) 480lm/m
	2700K(2725±145K) 480m/m
	3000K(3045±175K) 500lm/m
	3500K(3465±245K) 500lm/m
	4000K(3985±275K) 500lm/m
	4500K(4503±243K) 510lm/m
	5000K(5209±283K) 510lm/m
	6500K(6532±510K) 510lm/m
	Green(520-530nm) 550lm/m
	Blue (520-530nm) 90lm/m
	Red (620-630nm) 200lm/m

## Illuminance Distribution

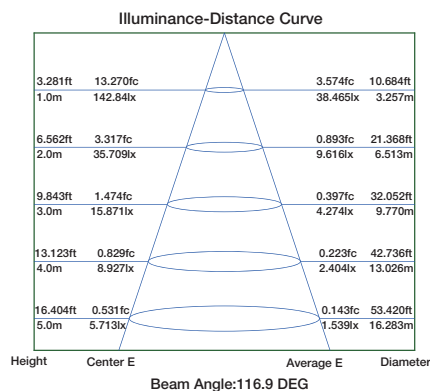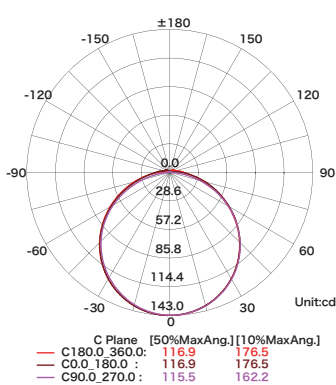

## White Color Charts

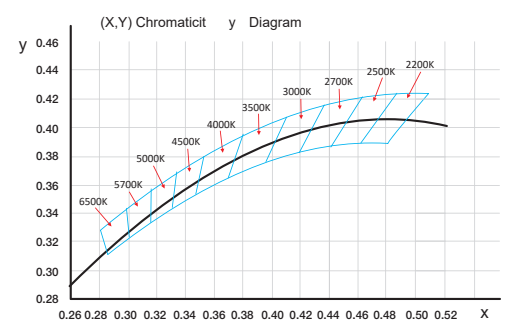

# SF06 Mono Color Silicone LED Linear Flex

## Connection

