


SF08 Mono Color Silicone LED Linear Flex

SF08-24V-2835-120-2200K-6500K

Specification

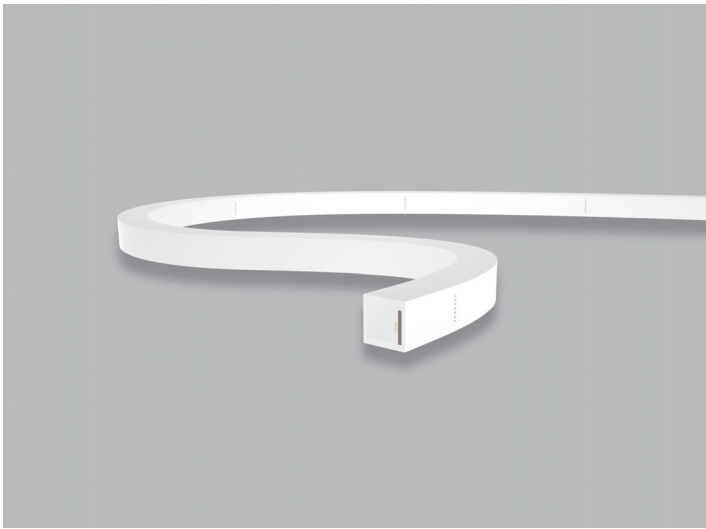

Dimension

Horizontal Bending

Min. Bending Diameter

Beam Angle

Ansi C78.377

4 SDCM

One Bin

Dimmable

Submersible

Ambient Temp.

Class 3

LM-80

IK08

UV resistant

Anti-Yellowing

Flame Resistant

Saltwater Resistant

Solvents Resistant

Dirt Resistant

CE

RoHS



Warranty

Technical Parameters


| Electrical | Optional Color | Lumen Output |
|-----------------------|----------------|--------------|
| Input Voltage | | |
| Power Consumption | | |
| Physical | | |
| LED Count | | |
| Cutting Unit | | |
| Cutting Unit Length | | |
| Minimum Bend Diameter | | |
| Output | | |
| LED Light | | |
| CRI | | |
| Max Run Length* | | |
| Single Feed | | |
| Double Feed | | |
| Beam Angle | | |
| Lumen Maintenance | | |
| Temperature Ranges | | |
| Installation | | |
| Operating | | |
| Dependability | | |
| Warranty | | |
| IP Rating | | |

| | Optional Color | Lumen Output |
|--|------------------|--------------|
| | 2200K(2238±102K) | 450lm/m |
| | 2700K(2725±145K) | 450lm/m |
| | 3000K(3045±175K) | 460lm/m |
| | 3500K(3465±245K) | 460lm/m |
| | 4000K(3985±275K) | 480lm/m |
| | 4500K(4503±243K) | 480lm/m |
| | 5000K(5029±283K) | 500lm/m |
| | 6500K(6532±510K) | 500lm/m |
| | Green(520-530nm) | 530lm/m |
| | Blue (520-530nm) | 80lm/m |
| | Red (620-630nm) | 190lm/m |

Illuminance Distribution

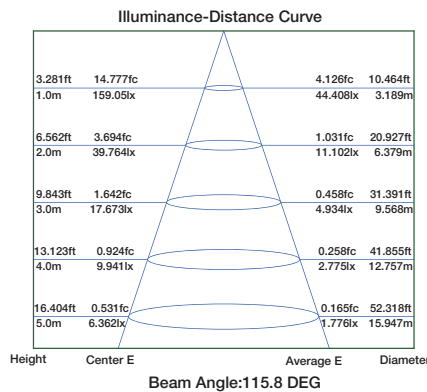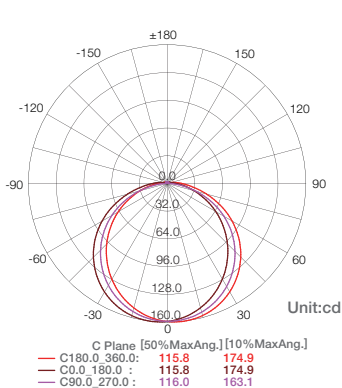

White Color Charts

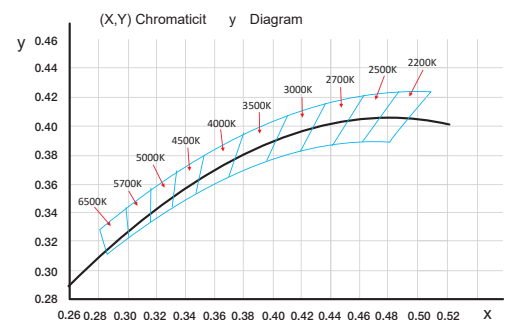

SF08 Mono Color Silicone LED Linear Flex

Connection

