


SF15 Mono Color Silicone LED Linear Flex

SF15-24V-2835-72-CC-2200K-6500K

Specification

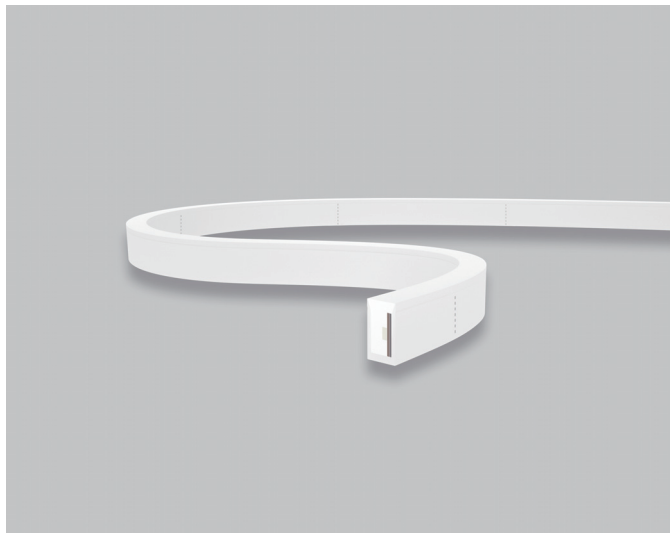

Dimension

Emitting Surface

Horizontal Bending

Min. Bending Diameter

Beam Angle

Ansi C78.377

4 SDCM

One Bin

Dimmable

Submersible

Ambient Temp.

Class 3

LM-80

IK08

UV resistant

Anti-Yellowing

Flame Resistant

Saltwater Resistant

Solvents Resistant

Dirt Resistant

CE

RoHS



Warranty

Technical Parameters

Electrical	Optional Color	Lumen Output
Input Voltage		
Power Consumption		
Physical		
LED Count		
Cutting Unit		
Cutting Unit Length		
Minimum Bend Diameter		
Output		
LED Light		
CRI		
Max Run Length*		
Single Feed		
Double Feed		
Beam Angle		
Lumen Maintenance		
Temperature Ranges		
Installation		
Operating		
Dependability		
Warranty		
IP Rating		

	Optional Color	Lumen Output
	2200K(2238±102K)	260lm/m
	2700K(2725±145K)	260lm/m
	3000K(3045±175K)	280lm/m
	3500K(3465±245K)	280lm/m
	4000K(3985±275K)	300lm/m
	4500K(4503±243K)	300lm/m
	5000K(5029±283K)	320lm/m
	6500K(6532±510K)	320lm/m
	Green(520-530nm)	180lm/m
	Blue (520-530nm)	30lm/m
	Lemon Yellow(520-530nm)	230lm/m
	Pink(630-645nm)	120lm/m

Illuminance Distribution

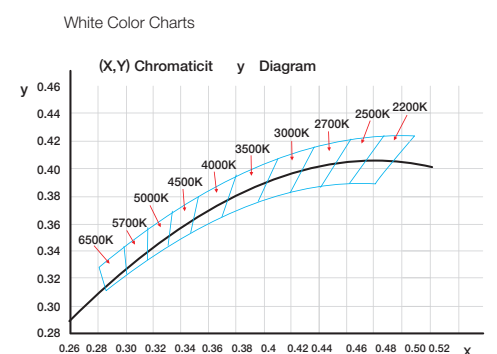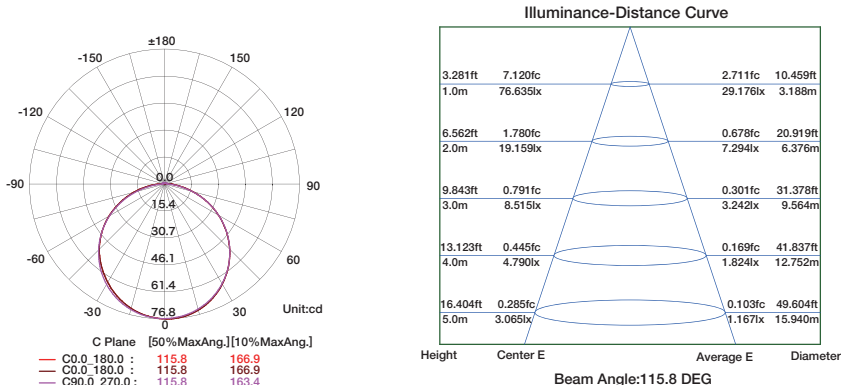

SF15 Mono Color Silicone LED Linear Flex

Connection

