





# SF15 Mono Color Silicone LED Linear Flex

SF15-24V-3528-72-2200K-6500K

## Specification


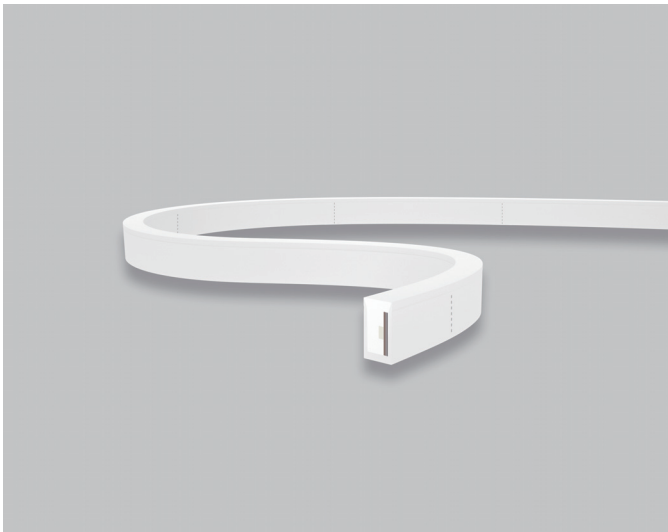


Beam Angle	Ansi C78.377	4 SDCM	One Bin	Dimmable	Submersible
Ambient Temp.	Class 3	LM-80	IK08	UV Resistant	Anti-Yellowing
Flame Resistant	Saltwater Resistant	Solvents Resistant	Dirt Resistant	CE	RoHS
5 years warranty Warranty					


## Technical Parameters

Electrical		Optional Color		Lumen Output	
Input Voltage	24V DC		2200K(2238±102K)	130lm/m	
Power Consumption	5W/m		2700K(2725±145K)	130lm/m	
Physical			3000K(3045±175K)	130lm/m	
LED Count	72 LEDs/m		3500K(3465±245K)	150lm/m	
Cutting Unit	12 LEDs		4000K(3985±275K)	150lm/m	
Cutting Unit Length	166.7mm		4500K(4503±243K)	150lm/m	
Minimum Bend Diameter	80mm		5000K(5029±283K)	160lm/m	
Output			6500K(6532±510K)	160lm/m	
LED Light	Epistar SMD LED 3528		Green(520-530nm)	120lm/m	
CRI	>80, >90		Blue (520-530nm)	10lm/m	
Max Run Length*			Red (620-630nm)	35lm/m	
Single Feed	15M		Pink(630-645nm)	40lm/m	
Double Feed	30 M		Amber(585-595nm)	35lm/m	
Beam Angle	120°		Orange(600-610nm)	30lm/m	
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C				
Temperature Ranges					
Installation	0°C to 50°C				
Operating	-40°C to 55°C				
Dependability					
Warranty	5 Years Warranty				
IP Rating	IP68 Wet location submersible <2m				

## Illuminance Distribution

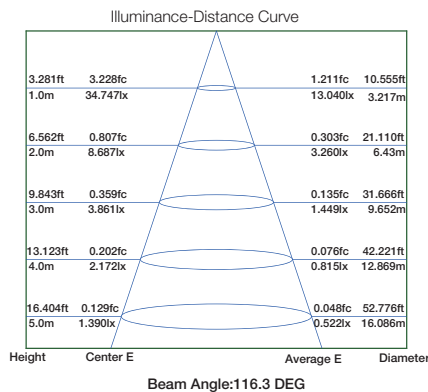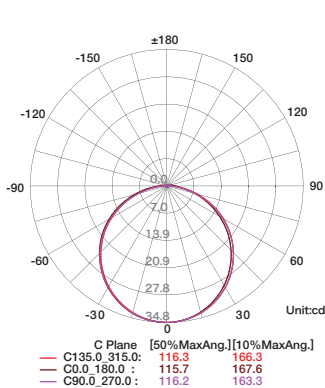

## White Color Charts

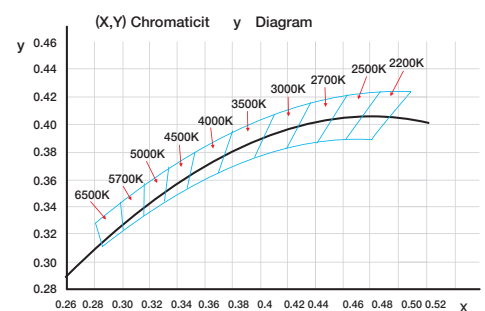

# SF15 Mono Color Silicone LED Linear Flex

## Connection

