


# SF15 Multi Color RGB Silicone LED Linear Flex

## SF15-24V-5050-60-RGB

### Specification

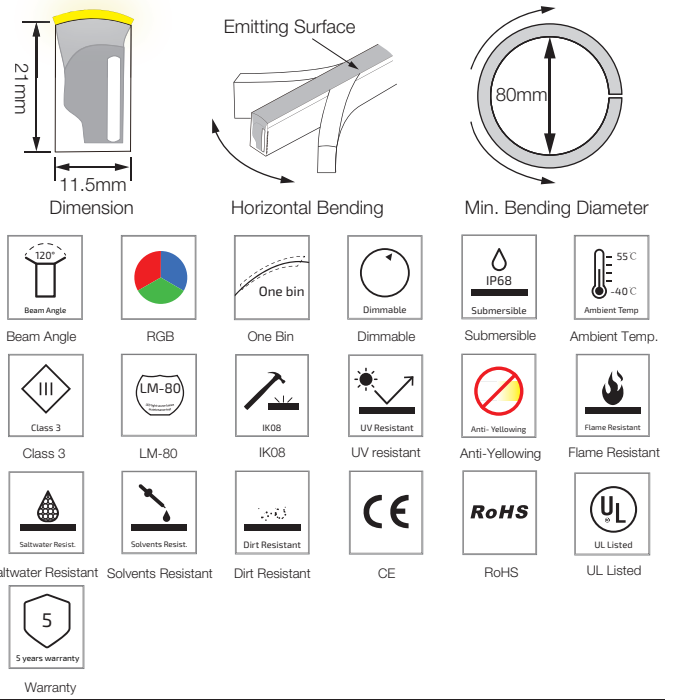


### Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	12W/m
Physical	
LED Count	60 LEDs/m
Cutting Unit	6 LEDs
Cutting Unit Length	100mm
Minimum Bend Diameter	80mm
Output	
LED Light	Epistar SMD LED 5050
Color	RGB
Max Run Length*	
Single Feed	10M
Double Feed	20M
Beam Angle	120°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
Warranty	5 Years Warranty
IP Rating	IP68 Wet location submersible <2m

Emitting Color	Lumen Output
Red	35lm/m
Green	100lm/m
Blue	24lm/m
RGB(White)	170lm/m

### Illuminance Distribution

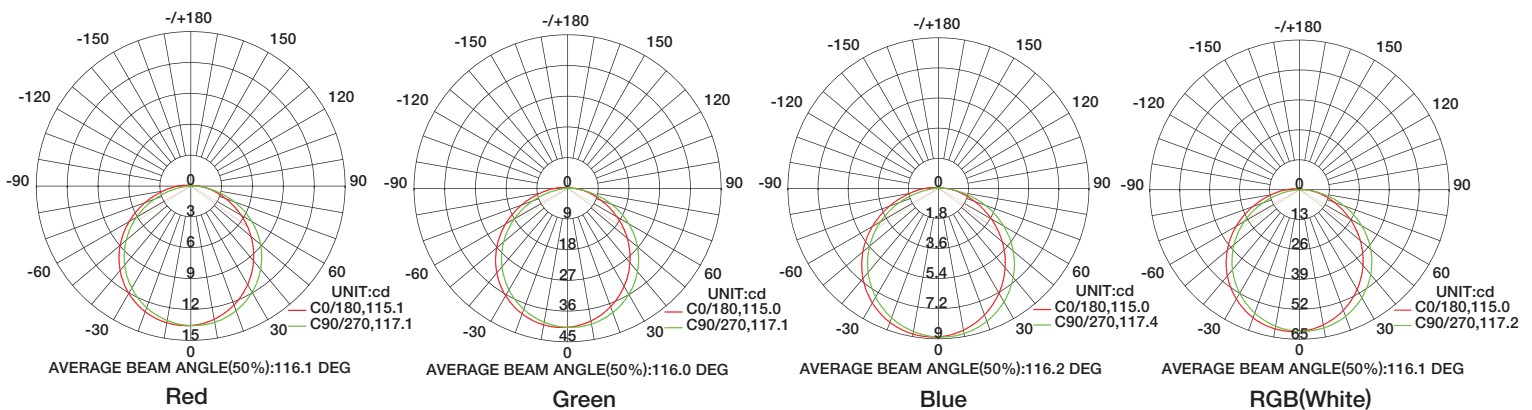

# SF15 Multi Color RGB Silicone LED Linear Flex

## Connection

