


# SF18 Mono Color Silicone LED Linear Flex

SF18-24V-2835-120-2200K-6500K

## Specification

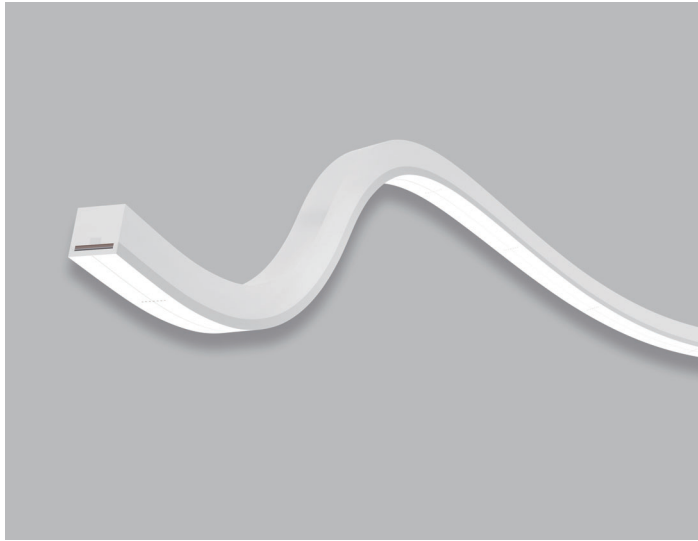

Dimension

Vertical Bending

Min. Bending Diameter

Beam Angle

Ansi C78.377

4 SDCM

One bin

Dimmable

Submersible

Ambient Temp.

Class 3

LM-80

IK08

UV Resistant

Anti-Yellowing

Flame Resistant

Saltwater Resistant

Solvents Resistant

Dirt Resistant

CE

RoHS



5 years warranty  
Warranty

## Technical Parameters


Electrical	
Input Voltage	24V DC
Power Consumption	10W/m
Physical	
LED Count	120 LEDs/m
Cutting Unit	12 LEDs
Cutting Unit Length	100 mm
Minimum Bend Diameter	120mm
Output	
LED Light	Epistar SMD LED 2835
CRI	>80, >90
Max Run Length*	
Single Feed	10M
Double Feed	20 M
Beam Angle	210°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
Warranty	5 Years Warranty
IP Rating	IP68 Wet location submersible <2m

Optional Color	Lumen Output
	2200K(2238±102K) 600lm/m
	2700K(2725±145K) 600lm/m
	3000K(3045±175K) 610lm/m
	3500K(3465±245K) 610lm/m
	4000K(3985±275K) 630lm/m
	4500K(4503±243K) 630lm/m
	5000K(5029±283K) 650lm/m
	6500K(6532±510K) 650lm/m
	Green(520-530nm) 440lm/m
	Blue (520-530nm) 85 lm/m
	Red (620-630nm) 180lm/m
	Amber (585-595nm) 140lm/m

## Illuminance Distribution

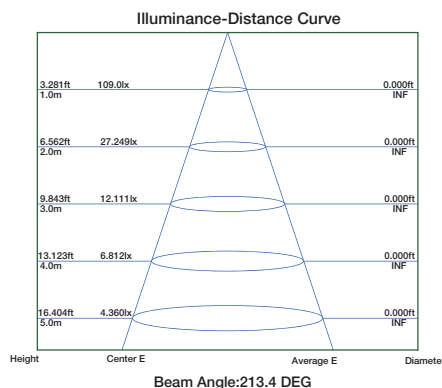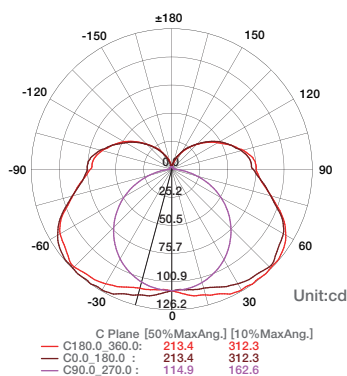

## White Color Charts

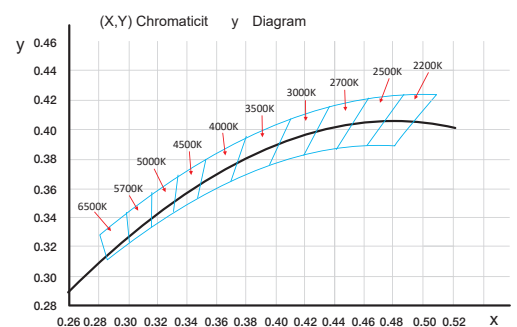

# SF18 Mono Color Silicone LED Linear Flex

## Connection

