


T18 Mono Color LED Linear Flex

T18-24V-3528-144-2200K-6500K

Specification

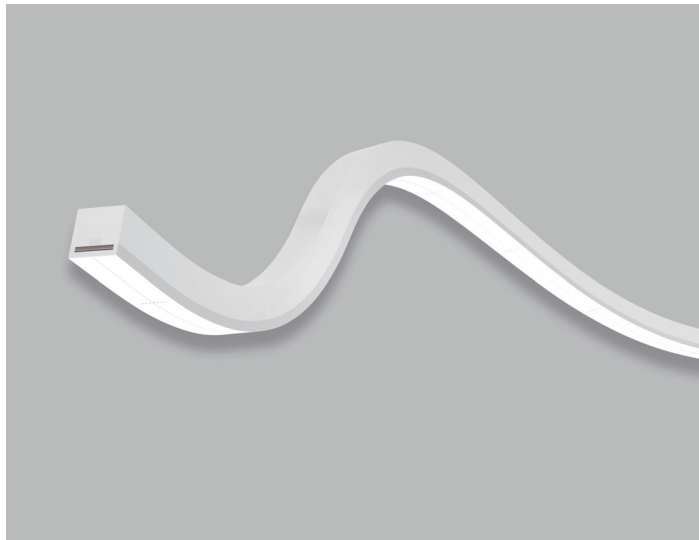

Dimension

Vertical Bending

Min. Bending Diameter

Beam Angle

Ansi C78.377

4 SDCM

One Bin

Dimmable

Submersible

Ambient Temp.

Class 3

LM-80

IK08

UV Resistant

Flame Resistant

Saltwater Resistant

Solvents Resistant

Dirt Resistant

CE

RoHS



Warranty

Technical Parameters


Electrical	
Input Voltage	24V DC
Power Consumption	10W/m
Physical	
LED Count	144 LEDs/m
Cutting Unit	12 LEDs
Cutting Unit Length	83.3 mm
Minimum Bend Diameter	120mm
Output	
LED Light	Epistar SMD LED 3528
CRI	>80, >90
Max Run Length*	
Single Feed	10M
Double Feed	20 M
Beam Angle	210°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-25°C to 50°C
Dependability	
Warranty	3 Years Warranty
IP Rating	IP68 Wet location submersible <2m

Optional Color	Lumen Output
	2200K(2238±102K) 360lm/m
	2700K(2725±145K) 360lm/m
	3000K(3045±175K) 400lm/m
	3500K(3465±245K) 400lm/m
	4000K(3985±275K) 430lm/m
	5000K(5029±283K) 430lm/m
	5700K(5669±355K) 410lm/m
	6500K(6532±510K) 410lm/m
	Green(520-530nm) 390lm/m
	Blue (520-530nm) 60lm/m
	Red (620-630nm) 120lm/m
	Pink(630-645nm) 360lm/m
	Amber (585-595nm) 90lm/m
	Orange(630-645nm) 80lm/m

Illuminance Distribution

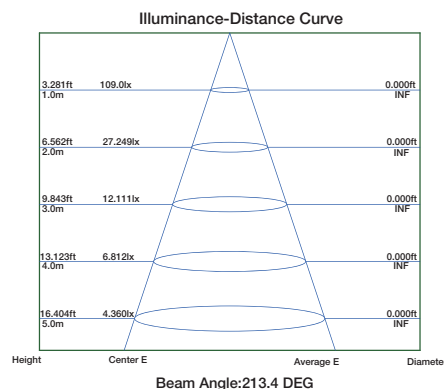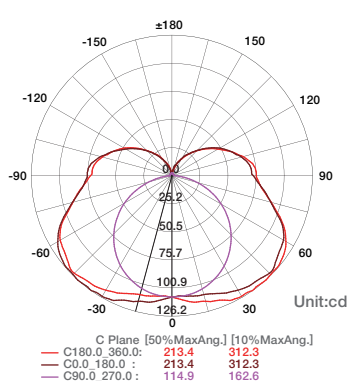

White Color Charts

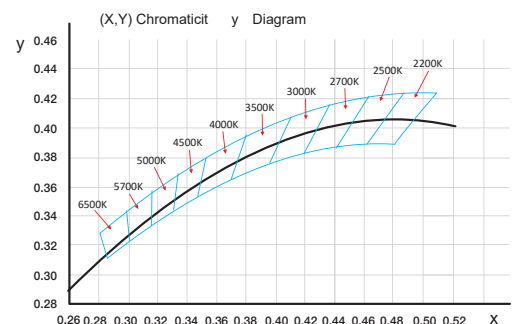

T18 Mono Color LED Linear Flex

Connection

FG (Green)
AC/L (Brown)
AC/N (Blue)

