


SF24 Mono Color 360– Emitting Silicone LED Linear Flex


SF24-24V-2835-288-U2-2200K-6500K

Specification



Φ24mm


Dimension

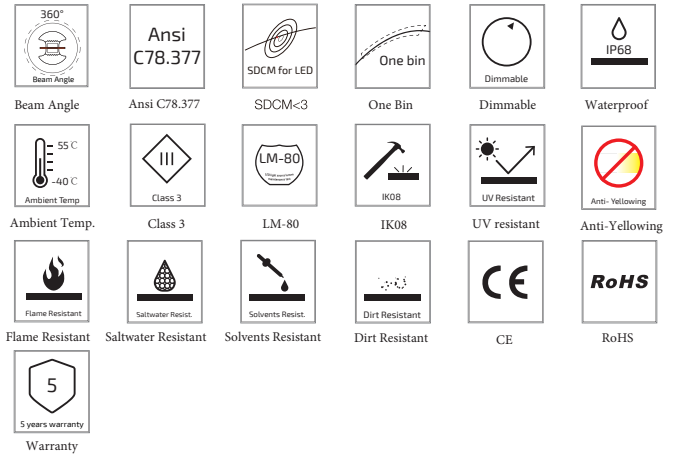


Technical Parameters

Electrical		Optional Color		Lumen Output
Input Voltage	24V DC		2200K(2238±102K)	1300lm/m
Power Consumption	16W/m		2700K(2725±145K)	1350lm/m
Physical			3000K(3045±175K)	1380lm/m
LED Count	288 LEDs/m		3500K(3465±245K)	1400lm/m
Cutting Unit	4 LEDs		4000K(3985±275K)	1420lm/m
Cutting Unit Length	16.67 mm		4500K(4503±243K)	1440lm/m
Minimum Bend Diameter	120mm		5000K(5029±283K)	1450lm/m
Output			6500K(6532±510K)	1460lm/m
LED Light	Epistar SMD LED 2835		Green(520-530nm)	1200lm/m
CRI	>80, >90		Blue (455-465nm)	280lm/m
Max Run Length*			Lemon Yellow(570-580nm)	1030lm/m
Single Feed	10 M		Pink(610-620nm)	600m/m
Double Feed	20 M			
Beam Angle	360°			
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C			
Temperature Ranges				
Installation	0°C to 50°C			
Operating	-40°C to 55°C			
Dependability				
Warranty	5 Years Warranty			
IP Rating	IP68			

Illuminance Distribution

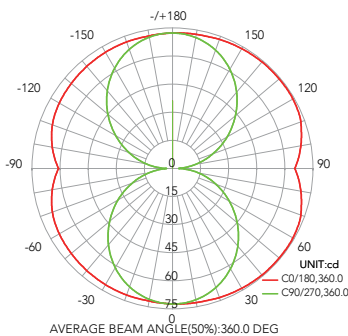

White Color Charts

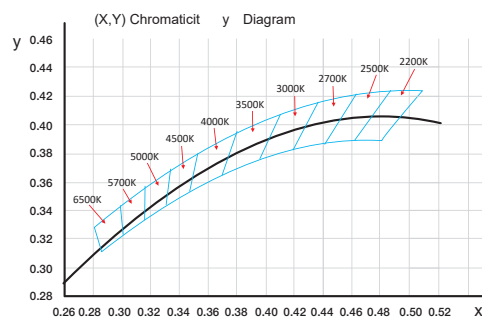

SF24 Mono Color Silicone LED Linear Flex

Connection

