


SF34 Tunable White Silicone LED Linear Flex

SF34-24V-2835-120-DW

Specification

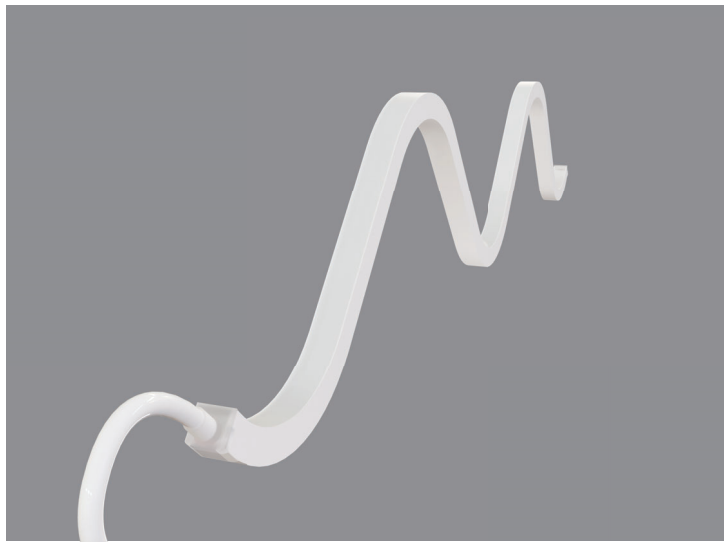

19.0mm
22.0mm

Dimension

Vertical Bending

400mm

Min. Bending Diameter

120° Beam Angle	Ansi C78.377 Ansi C78.377	SDCM for LED SCCM<3	One bin One Bin	Dimmable Dimmable	IP68 Submersible Submersible
55°C / -40°C Ambient Temp.	Class 3 Class 3	LM-80 LM-80	IK08 IK08	UV Resistant UV resistant	Anti-Yellowing Anti-Yellowing
Flame Resistant	Saltwater Resistant	Solvents Resistant	Dirt Resistant	CE CE	RoHS RoHS
5 years warranty Warranty					


Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	12W/m
Physical	
LED Count	120 LEDs/m
Cutting Unit	12 LEDs
Cutting Unit Length	100 mm
Minimum Bend Diameter	400mm
Output	
LED Light	Epistar SMD LED 2835
CRI	>80, >90
Max Run Length*	
Single Feed	10 M
Double Feed	20 M
Beam Angle	120°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
Warranty	5 Years Warranty
IP Rating	IP68 Wet location submersible <2m


Optional Color Combinations

- 2200K+5700K
- 2700K+5700K
- 3000K+5700K

Illuminance Distribution

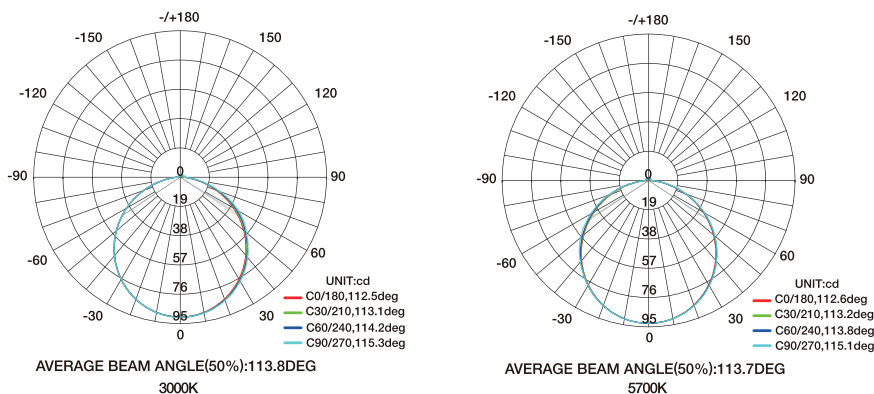

White Color Charts

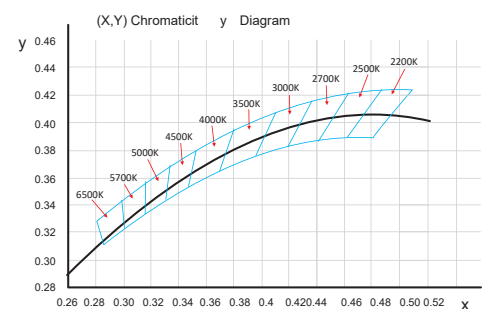

SF34 Mono Color Silicone LED Linear Flex

Connection

