


# SF34 DMX Pixel Chasing RGB Silicone LED Linear Flex

SF34-24V-5050-84-DMX3-RGB

## Specification

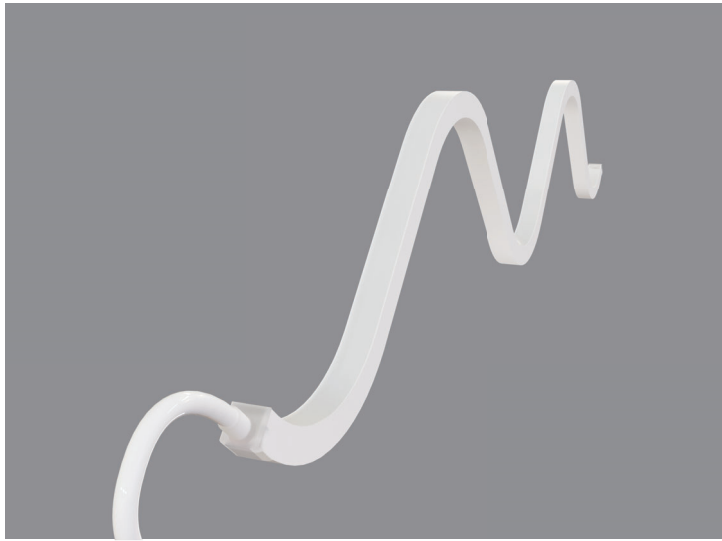

**Dimension**  
19.0mm  
22.0mm

**Vertical Bending**  
Emitting Surface

**Min. Bending Diameter**  
400mm

Beam Angle	Pixel RGB	DMX512	Dimmable	Submersible	Ambient Temp
Class 3	LM-80	IK08	UV Resistant	Anti-Yellowing	Flame Resistant
Saltwater Resistant	Solvents Resistant	Dirt Resistant	CE	RoHS	5 Years warranty


## Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	18W/m
Physical	
LED Count	84 LEDs/m
Cutting Unit	7 LEDs
Cutting Unit Length	83.3mm
Minimum Bend Diameter	400mm
Output	
LED Light	Epistar SMD LED 5050
Color	RGB
Working Mode	DMX (RS485)
Pixels Quantity	12 Pixels/m
IC Chips	UCS512
Max Run Length*	
Single Feed	8 M
Double Feed	16 M
Beam Angle	120°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C

Emitting Color	
	Red
	Green
	Blue
	RGBW

Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
Warranty	5 Years Warranty
IP Rating	IP68 Wet location submersible <2m

## Illuminance Distribution

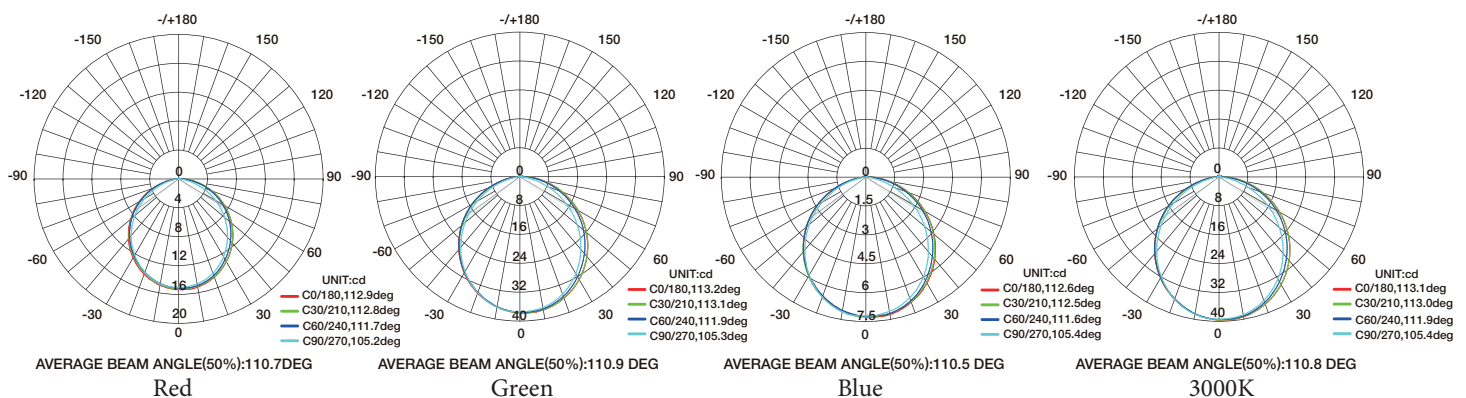

# SF34 DMX Pixel Chasing RGB Silicone LED Linear Flex

## Connection

